


---

## BACKFLOW PREVENTER ABOVE GROUND INSTALLATION

---

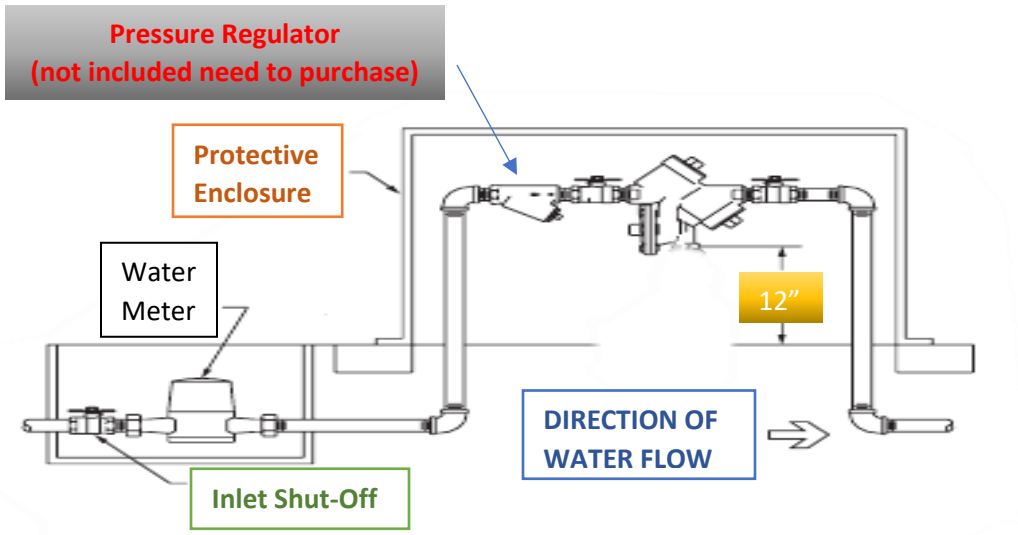

1. The Backflow Device shall be installed on the property side of the meter where it is visible.
2. All Reduced Pressure Backflow Devices shall be installed 12" above ground, in a horizontal position.
3. Shut off valves shall be full port, line size, lever type, and ¼ turn bronze ball valves.
4. Backflow Devices shall have two resilient seat bronze union between the shut off valves for removal of the device, except ¾" – 2" Wilkins #375 Series.
5. The Backflow Device shall have four (4) test cocks with one being installed on the side of the inlet ball valve.
6. Approved above ground enclosures: "Hot Box"